
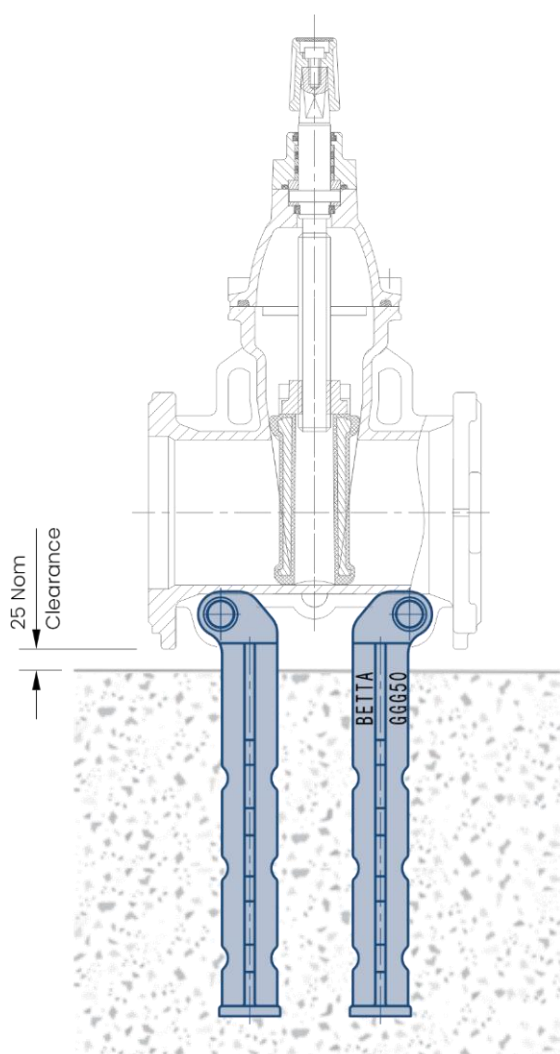


APPLICATION

Anchor Legs are designed to secure gates valves and restrain pipeline thrust. They are compatible with AS/NZS 2638 Gate Valves.

FEATURES

- High strength ductile iron material.
- Easy installation. Simply bolt to base of gate valve.
- Grade 316 stainless steel corrosion resistant fasteners.
- Fusion bonded polymeric coating for long life corrosion protection.

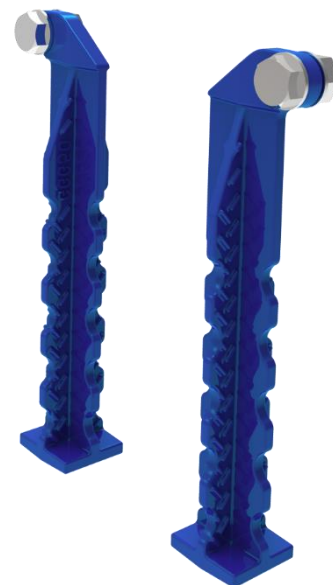

TECHNICAL DATA

Size Range:	DN 100 and DN150 AS/NZS 2638 Gate Valves	
Pressures:	Allow Operating Pressure	1600 kPa (PN 16)
	Max Site Test Pressure	2000 kPa
Thrust Block:	Designed to Local Authority requirements.	

VALVE ANCHOR LEG KIT – Compatible Valves

Compatible Valve Sizes & Types	Product Code
DN 100 and DN 150 Flanged, Socket, Spigot & Restraint Ends	VGZAL

KIT COMPONENTS

PART	MATERIAL	KIT QTY
Anchor Leg	Ductile Iron Gr 500-7 to AS 1831 with Fusion Bonded coating to AS/NZ 4158	2
Bolts	Stainless Steel Gr 316 Bolts	2
Nuts	Stainless Steel Gr 316 Nuts	2
Washers	Stainless Steel Gr 316 Washers	4

CIVILPIPES PTY LTD

ABN 30 168 566 667
2 Potassium St. Narangba Qld 4504
PO Box 304, North Lakes Qld 4509



Web:
civilpipes.com.au



Telephone:
+61 7 3053 3456



E-mail:
sales@civilpipes.com.au



VGZAL_0324