


## TECHNICAL DATA

Standards:	AS/NZS 2280
Size Range:	DN 100 – DN 750
Pressure Range:	PN35 minimum
PN35 Coating:	Base Coat – ZnAl Primer Top Coat – Synthetic epoxy resin (Blue or Red)
PN35 Linings:	Blue CL Pipe – SR Cement (Standard) Blue SC Pipe – SR Cement with Seal Coat Red CA Pipe – CaAl Cement (Waste water)
Joining:	Spigot – Socket rubber ring joint

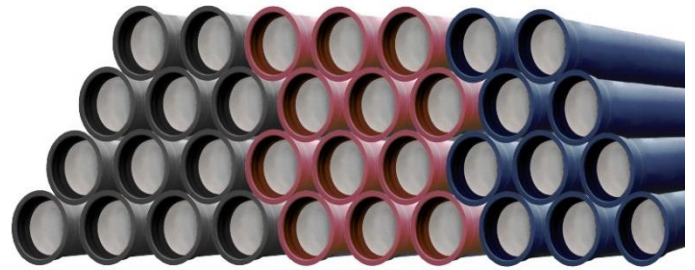

## OPTIONS:

Flange Class:	Thick wall suitable for machining and screwing pipe flanges Zinc coated with resin topcoat SC and CA linings available on special request
Polyurethane:	Lining – Polyurethane lining to EN 15655 Coating – Polyurethane coating to EN 15189 (700um – 2,000um)
Bitumen:	Zinc Primer + Bitumen coating
ISO:	ISO diameters available on request for projects.
Restraint Joints:	Double socket restraint sockets or mechanical restraint joints. Project related minimum quantities apply.

PN35 PIPE							
DN	OD	Effective Length	Mean ID DICL Pipe	Mass approx Kg / Length	PN35 DICL Blue CL	PN35 DICL Blue SC	PN35 DICL Red CA
100	122	5.5m	102	102	DPCL10	DPSC10	DPCA10
150	177	5.5m	157	150	DPCL15	DPSC15	DPCA15
200	232	5.5m	212	200	DPCL20	DPSC20	DPCA20
225	259	5.5m	239	240	DPCL22	DPSC22	DPCA22
250	286	5.5m	265	270	DPCL25	DPSC25	DPCA25
300	345	5.5m	322	360	DPCL30	DPSC30	DPCA30
375	426	5.5m	401	520	DPCL37	DPSC37	DPCA37
450	507	5.5m	480	680	DPCL45	DPSC45	DPCA45
500	560	5.5m	532	800	DPCL50	DPSC50	DPCA50
600	667	5.5m	636	1,100	DPCL60	DPSC60	DPCA60
750	826	5.5m	790	1,600	DPCL75	DPSC75	DPCA75

## CIVILPIPES PTY LTD

ABN 30 168 566 667  
2 Potassium St. Narangba Qld 4504  
PO Box 304, North Lakes Qld 4509



Web:  
civilpipes.com.au



Telephone:  
+61 7 3053 3456



E-mail:  
sales@civilpipes.com.au

