


APPLICATION

The Logi Valve SS Industrial ball valve range is suitable for high pressure water and gas applications.

TECHNICAL DATA

Standards:	SPEC012 and AS4617 Tested and Certified
Size Range:	DN 15 – DN 50
Working Pressure:	PN40 Max
Temperature:	-20 to 120 deg C
Material:	316SS body, stem, ball and cap
Actuator:	Lever Handle with locking device

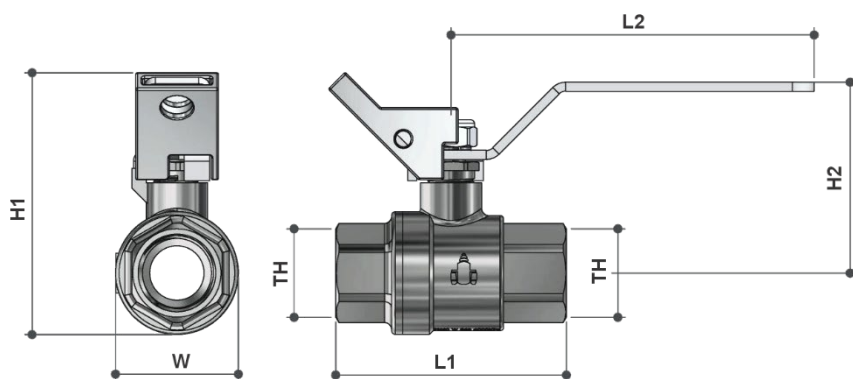

FEATURES

- Watermark and AGA approved
- Full bore design
- 100% pressure tested
- Blow proof spindle
- Stainless steel components
- PTFE Seals and Packing

DIMENSIONS

DN	L1 mm	L2 mm	H1 mm	H2 mm	W mm	TH Ends	CODE
15	64	101	73	53	34	15 F-BSP	BVBSL15
20	71	101	80	57	42	20 F-BSP	BVBSL20
25	83	101	90	63	51	25 F-BSP	BVBSL25
32	94	140	108	82	61	32 F-BSP	BVBSL32
40	104	140	121	89	72	40 F-BSP	BVBSL40
50	126	140	137	96	90	50 F-BSP	BVBSL50

COMPONENTS

PART	MATERIAL
Body & Cap	CF8M
Seals	PTFE
Ball	SS Gr 316
Bonnet	CF8M
Handle	SS Gr 316
Lock Nut	SS Gr 316
Spindle	SS Gr 316



CIVILPIPES PTY LTD

ABN 30 168 566 667
2 Potassium St. Narangba Qld 4504
PO Box 304, North Lakes Qld 4509



Web:
civilpipes.com.au



Telephone:
+61 7 3053 3456



E-mail:
sales@civilpipes.com.au

